# **Two-way HDMI Splitter**



#### Package contents

- HDMI splitter
- AC power adapter
- Quick Setup Guide

#### You will need:

High-speed HDMI cables

#### Features

 Sends HDMI A/V signals from a single source, such as a Blu-ray/DVD player, set-top box, to two destinations, such as a TV and A/V receiver.

**rocketfish**...

- Supports full 1080p video resolution
- Supports 3D video
- Compatible with most TV and PC monitor video resolutions


## **HDMI splitter basics**


This Rocketfish two-way HDMI splitter will send the HDMI audio and video signals from a single source, such as a Blu-ray/DVD player or cable/satellite box, to two destinations, such as a TV and A/V receiver. It is ideal for sending the audio signals from a 3D Blu-ray player to an A/V receiver that does not support 3D video pass-thru.

### Setting up your HDMI splitter

- 1 Connect one end of a high-speed HDMI cable (not included) to your video source and the other end to the **IN** port on the HDMI splitter.
- 2 Connect another high-speed HDMI cable to your HDMI splitter's **OUT 1** port to an HDTV.
- 3 Connect another high-speed HDMI cable to your HDMI splitter's **OUT 2** port to an A/V receiver.
- **4** Connect the included AC adapter from the DC jack on the HDMI splitter to a standard 110/120V AC outlet. Power on all connected devices and operate per the manufacturer's instructions.

## Connecting a TV and A/V receiver to a single HDMI source

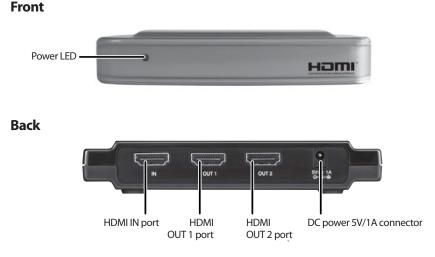

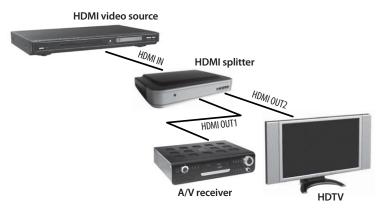

**QUICK SETUP GUIDE** 

## Troubleshooting

Toubleshooting		
Symptom	Possible solution	
LED is not ON or lit	<ol> <li>Make sure that the HDMI splitter's power adapter is plugged in.</li> <li>Make sure that the video device or TV's power cord is plugged in.</li> </ol>	
No video and/or audio	<ol> <li>Make sure that your DVD movie is original. HDMI includes HDCP copy protection, which prevents playback of illegally copied movies.</li> </ol>	
	<b>2</b> Make sure that the HDMI cable is not broken and is securely connected.	
	<b>3</b> Make sure that the audio and video formats of the content being used (i.e., Blu-ray disc) are supported by all connected devices.	
	4 Make sure that your destination components (i.e., TV and A/V receiver are set to the HDMI inputs with which the splitter's HDMI outputs are connected.	
	5 Make sure that you are using high-speed HDMI cables for all connections. We recommend high-quality Rocketfish HDMI cables, available at your local Best Buy or Future Shop stores in lengths from 4 to 24 feet.	
	<b>6</b> Unplug the HDMI splitter's AC power adapter, then plug it back in again.	
	<b>NOTE</b> : If using with two TVs or monitors, connect the TV with the lowest resolution to the <b>OUT 1</b> port to make sure video is displayed on both TVs. The splitter uses the resolution, timing information, and audio formats of the TV with the lowest resolution for both TVs	
Video has some noise	1 Make sure that you are using high-speed HDMI cables for all connections. We recommend high-quality Rocketfish HDMI cables, available at your local Best Buy or Future Shop stores in lengths from 4 to 24 feet.	
	2 Make sure that the TV's video resolution supports the video source's output resolution.	

## Specifications

•	
HDMI version	1.4A
Video amplifier bandwidth	225 MHz / 6.75 Gbps
Single link range	480i to 1080p from source device
Vertical frequency range	25 Hz to 60 Hz
HDMI input connector	HDMI Type A (1)
HDMI output connector	HDMI Type A (2)
HDMI HDCP compliant	Pass HDCP data between source and monitor
Power consumption	5 Watts (maximum)
Power supply	5VDC/1000 mA
Dimensions	5.19 × 3.39 × 0.98 in. (130 × 86 × 25 mm)
Shipping weight	.82 lb (.372 kg)

### **One-year limited warranty**

Visit <u>www.rocketfishproducts.com</u> for details.

## **Contact Rocketfish:**

For customer service call 1-800-620-2790 www.rocketfishproducts.com

Distributed by Best Buy Purchasing, LLC

7601 Penn Avenue South, Richfield, MN 55423-3645 USA

© 2010 BBY Solutions, Inc., All Rights Reserved. ROCKETFISH is a trademark of BBY Solutions, Inc. All other products and brand names are trademarks of their respective owners.